



POE Ethernet Switch



RAMON



MADE IN IRAN



سوئیچ POE رامون
SNS-P10208CBMH



SNS-P10208CBMH


Introduction

10 - Port POE Switch
8 - Port 10/100Base-T(X) POE 2 - Port 100 Base-T(X) Uplink Port

Features

- ▶ 250m Distance, Watchdog Function, Supports Quality of Service.(QoS)
- ▶ Whole Power:120W(52V 2.3A),Internal power supply.
- ▶ All port supported by MDI/MDIX auto flip and self negotiation
- ▶ Supply 8 10/100Mbps adaptive high speed forwarding data packet
- ▶ Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.

Dimensions

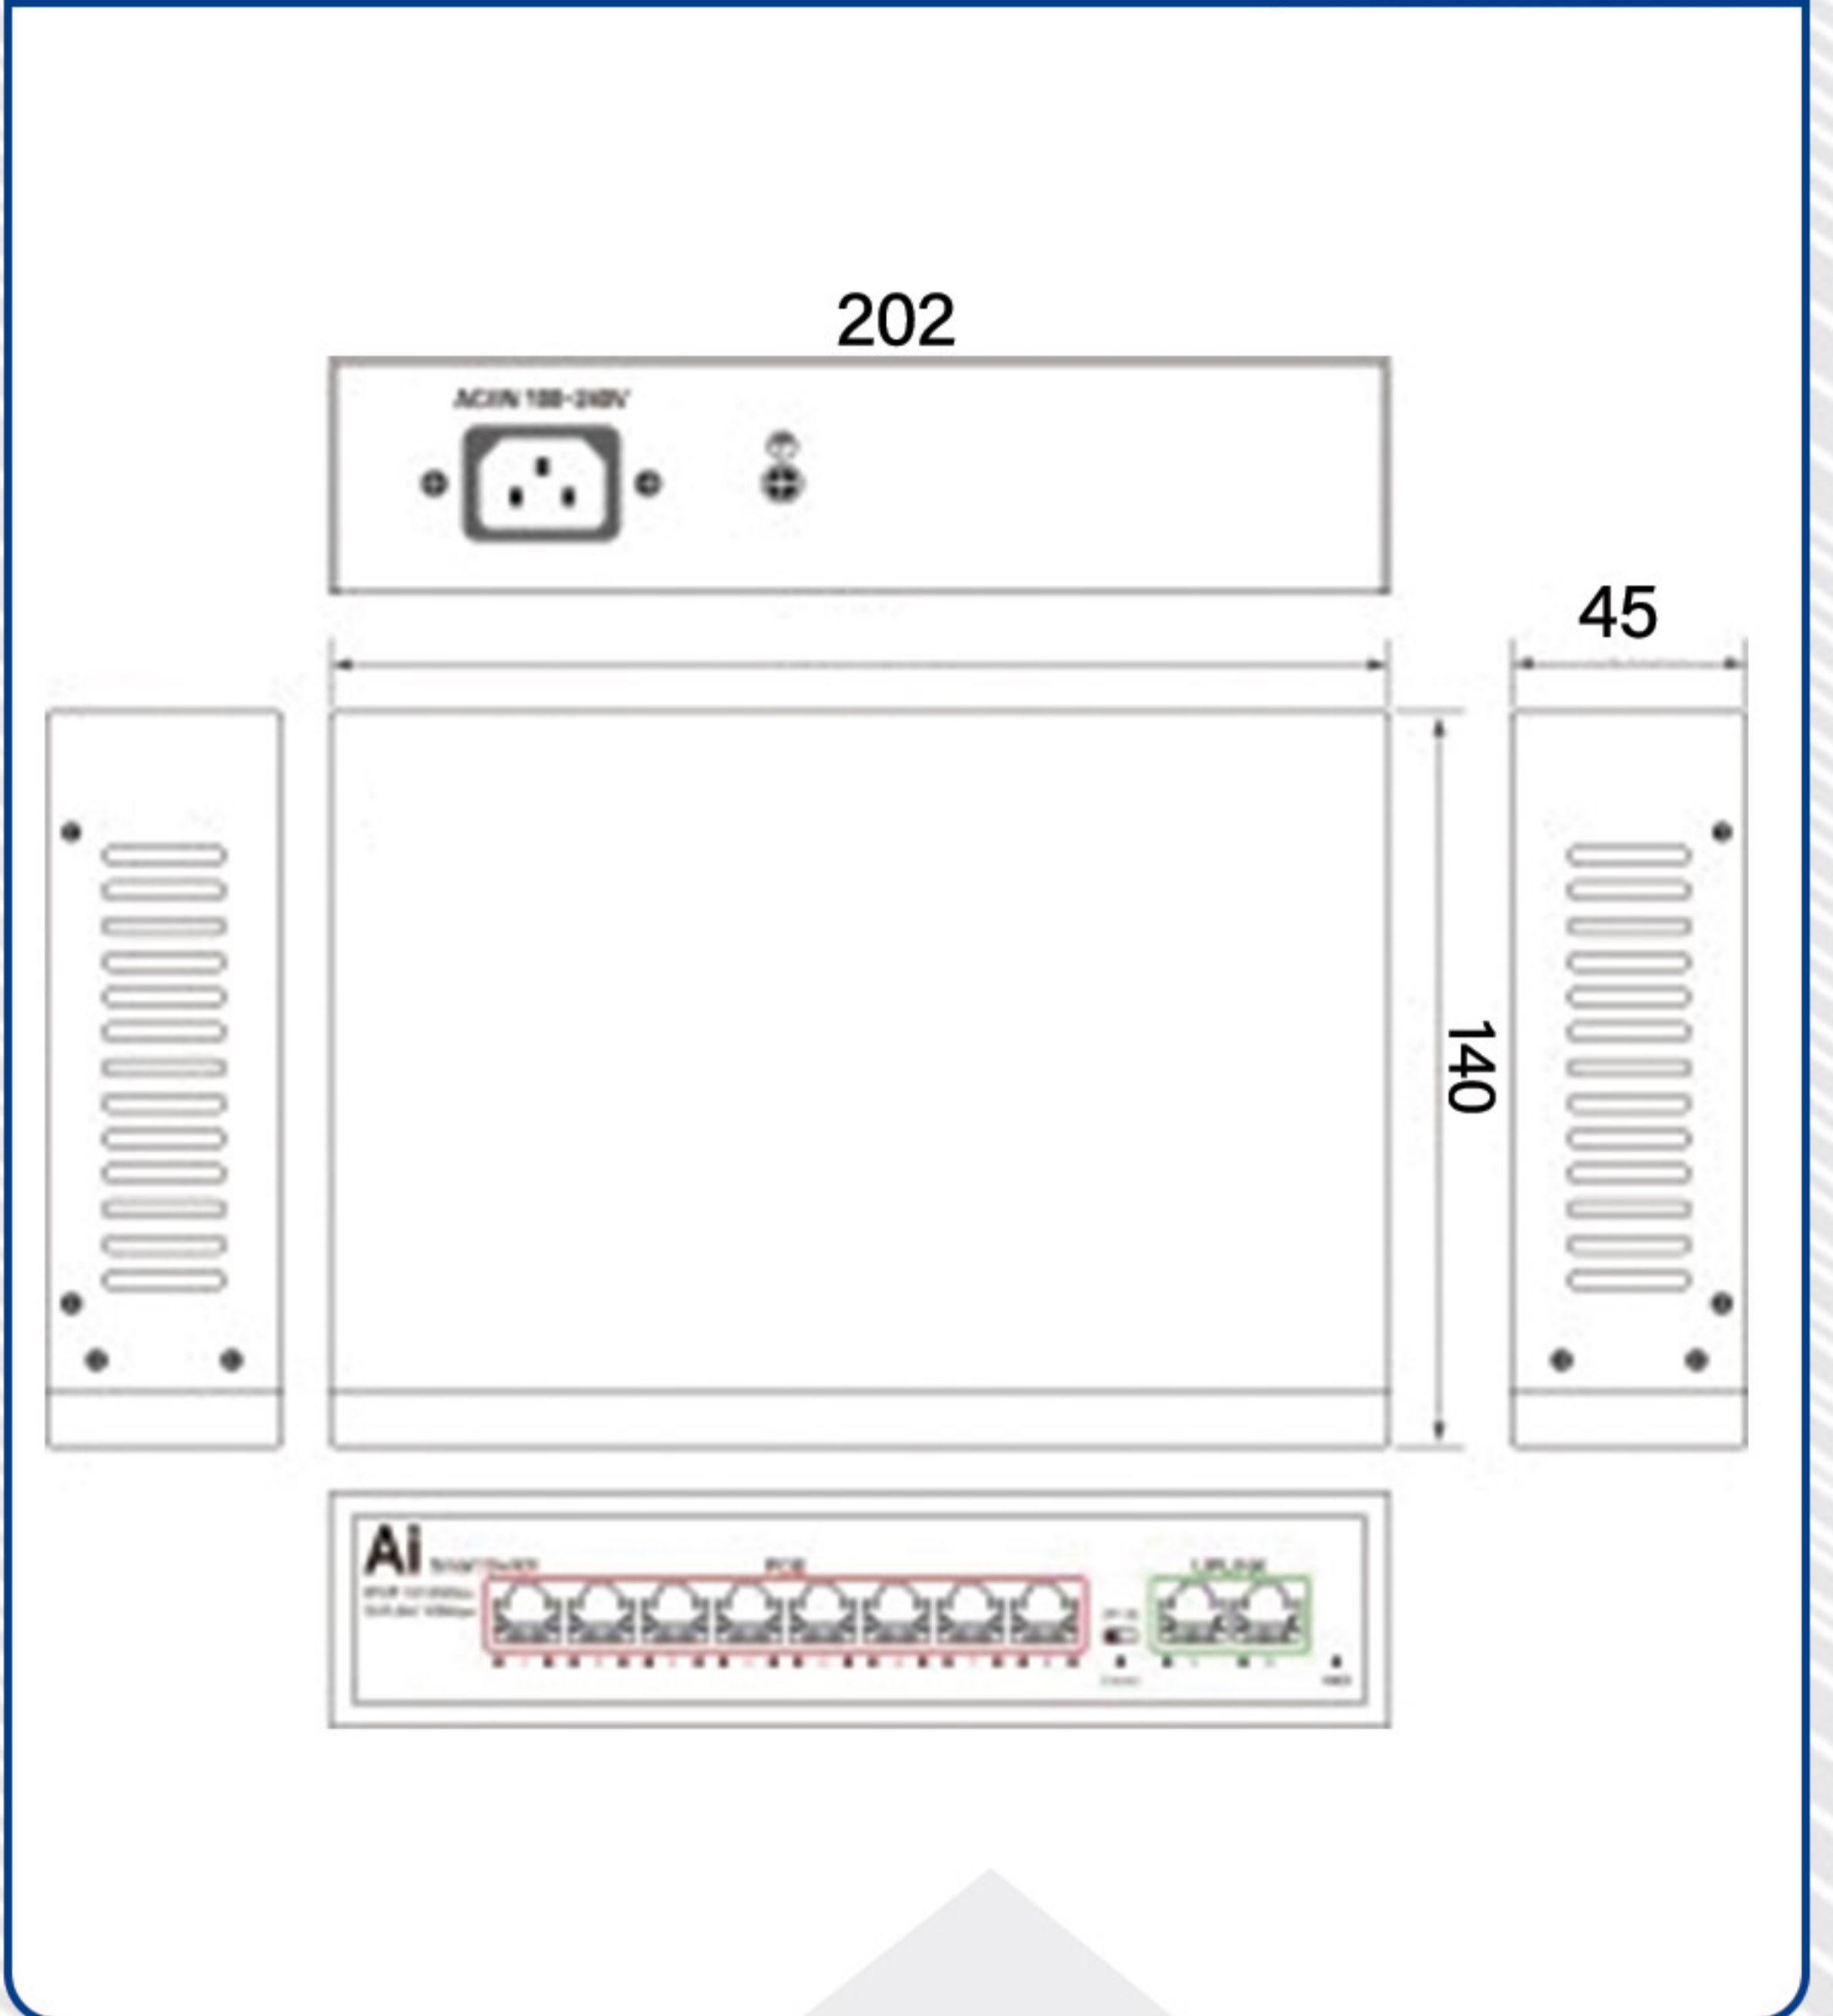

Specifications

Product	8+2 Port 250m POE Switch (Built-in)
Model	SNS-P10208CBMH
POE Port	1 to 8 support IEEE802.3AF/AT Standard
Output Power	15.4W/30W IEEE802.3af/at
Power Pin	Both 1/2+, 3/6- and 4/5+7/8-
Whole Power	≤120W (52V 2.3A)
POE Protocol	IEEE 802.3af/IEEE 802.3at
POE Type	End-span
Power Distance	≤250m
Network Standard	IEEE 802.3、IEEE802.3u、802.3x、802.3af/at
Network Medium	10/100BASE-TX:5 class and above non shielded twisted pair
Data Distance	≤250m
Switch Capability	1.6Gbps
Forwarding Mode	Store and forward
Forwarding Rate	10BASE-T:14880PPS/port 100BASE-tx:14800pps/port
MAC Address	MAC address table 1K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	LINK/ACT.100Mbps;POE Status Indicator; Power indicator;Extender
Working Environment	Working temperature: -10°-- 55°C
Weight	1.7kg
Size	202mm*140mm*45mm(L*W*H)
Warranty	3-years SEPANTA Gold Warranty