



POE Ethernet Switch



RAMON



MADE IN IRAN



سوئیچ POE رامون

SNS-P302024CBMH



SNS-P302024CBMH


Introduction

- 26- Port POE Switch
- 24 - Port 10/100Base-T(X) POE
- 2 - Port 10/100/1000Base-T(X) Uplink Port

Features

- ▶ 250m Distance;Vlan support, Watchdog function, Supports Quality of Service (QoS),
- ▶ Whole Power:300W, internal power supply;
- ▶ All port supported by MDI/MDIX auto flip and self negotiation
- ▶ Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mod
- ▶ Each port max. power supply reached 30W.

Dimensions

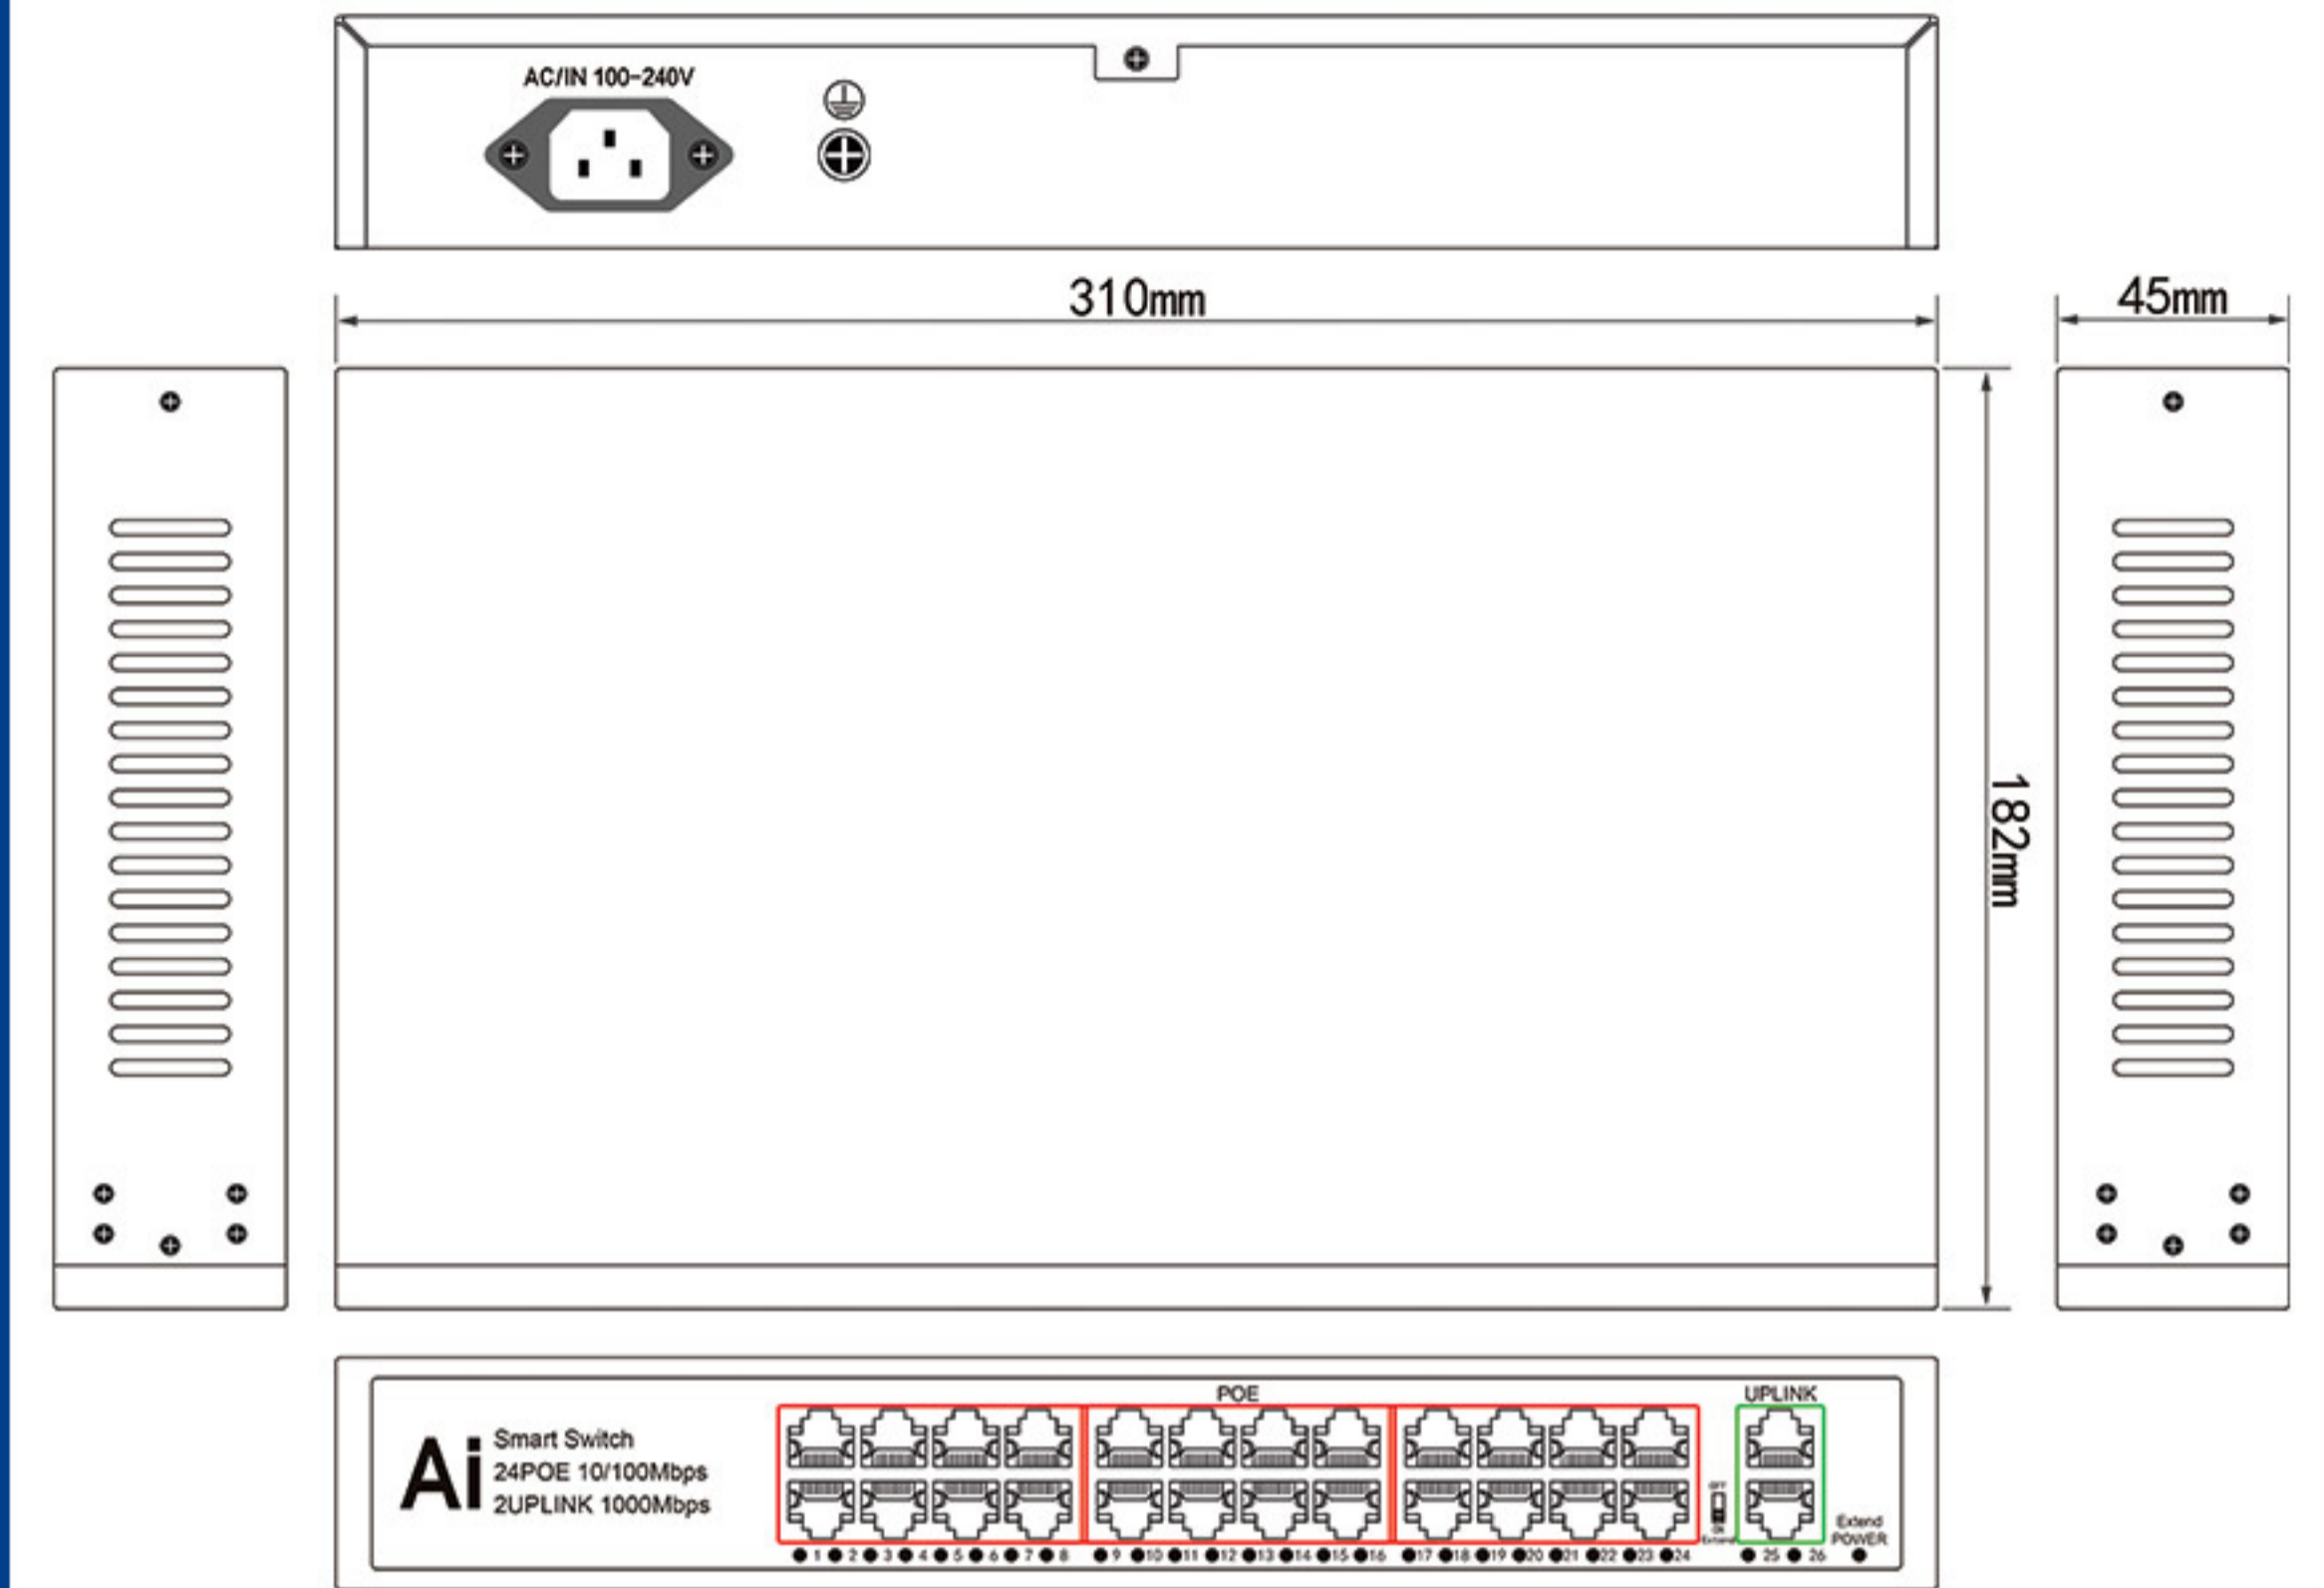

Specifications

POE Port	1 to 24 port support IEEE802.3af/at
UP link port	25 th -26 th port support 1000Mbps
PoE output	15.4W/30W IEEE802.3af/at
PoE whole power	≤300W
PoE type	End-span
Power distance	≤250m
Network Standard	IEEE 802.3、IEEE802.3u、802.3x、802.3af/at
Network Medium	100/1000BASE-TX: 5 class and above non shielded twisted pair
Data Distance	Distance ≤250m
Backplane bandwidth	12Gbps
Forwarding Mode	Store and forward
Forwarding Rate	10BASE-T:14880PPS/port 100BASE-tx:14800pps/port 1001000BASE-T: 1488095pps/port
MAC Address	2K MAC address table
Port function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
Indicator	LINK/ACT. 100Mbps;POE Status indicator; POWER indicator;EXTENDER indicator
Working Environment	Working Temperature: -10°-- 55°C
Input power	AC100-240V 50/60HZ
Weight	2kg
Size	312mm*182mm*45mm(L*W*H)
Warranty	3-years SEPANTA Gold Warranty